

RD Split Displacement Sensor



Technical Characteristics

- Rugged and fully enclosed design
- Non-wear, non-contact measurement method
- Linear measurement, absolute output
- Sealing grade up to IP68
- Low power consumption design effectively reduces system heating
- Ultra-high temperature sensing rod (up to + 125 °C)
- Multiple interfaces available: Analog, SSI, Profibus-DP, CANopen, Start-Stop, Profinet, EtherCAT

C Product Parameters

• Input

Measurement data	Position Magnet ring
Stroke length	25mm~5500mm, customized according to customer needs

• Output

Interface	Analog、SSI、CANopen、Profibus-DP、Start-Stop、Profinet、EtherCAT
Resolution	Analog: 16-bit D/A or 0.0015% of full scale (min. 1μm) Bital: 0.5 / 1 / 2 / 5 / 10 / 20 / 40 / 50 / 100 μm
Nonlinearity	< ± 0.01% of full scale, Min. ± 50μm
Repetition accuracy	< 0.001% for full-scale taxis, Min. ± 1μm
Hysteresis	< 10μm
Update time	1KHz (range≤1m) 500Hz (1m<range≤2m) 250Hz (2m<range≤3m) , customizable
Temperature coefficient	< 30ppm/℃

• Working conditions

Magnet ring velocity	Arbitrary
Protection level	IP68 (Sensor Lever)
Operating temperature	Sensor rod -40℃ ~ +125℃ , electronic bin-40℃ ~ +85℃
Humidity/dew point	100%, relative humidity
Shock index	GB/T2423.5 100g(6ms)
Vibration index	GB/T2423.10 20g/10~2000Hz
EMC test	GB/T17626.2/3/4/6/8, Grade 4/3/4/3/3, Class A, CE Certification

• Electrical connection

Input voltage	+24Vdc±20%
operating current	< 100mA (varying with range)
Polarity protection	Max.-30Vdc
Overpressure protection	Max.36Vdc
Insulation resistance	> 10MΩ
Insulation strength	500V

• Structure and materials

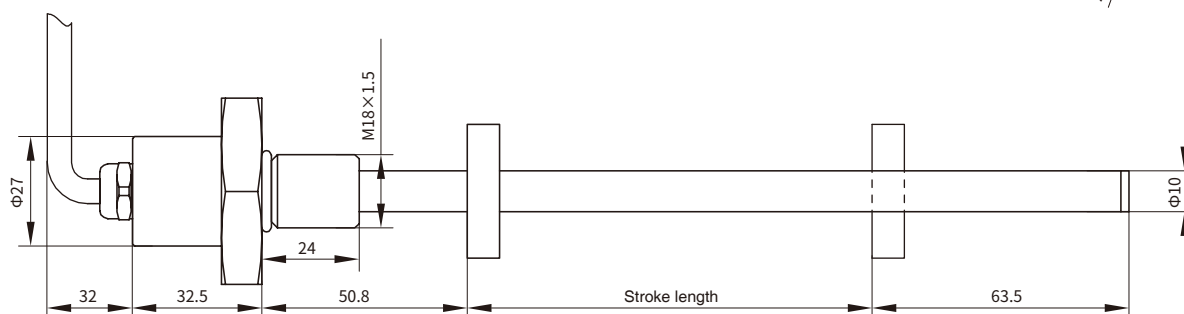
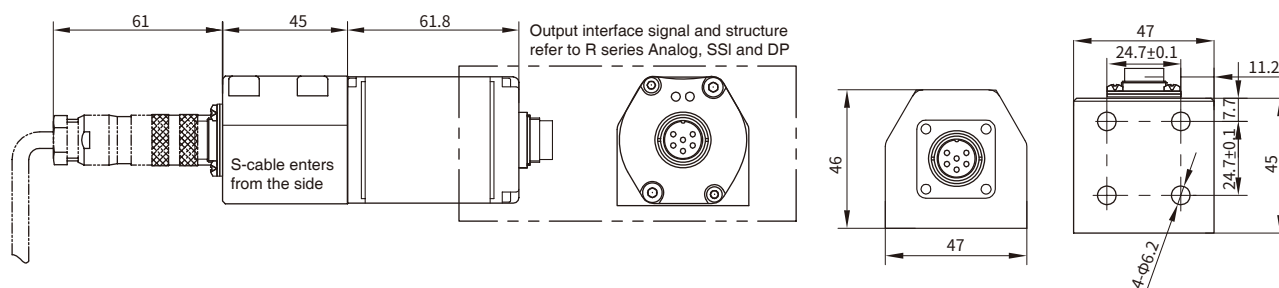
Fault indication	Electronic bin cover with LEDs display
Electronic bin	Aluminum alloy
Measuring rod	304 stainless steel
Outer tube pressure	35MPa (continuous)/70MPa (peak) or 350bar (continuous)/700bar (peak)
Position magnet	Standard Magnet ring and various magnet rings
Mounting thread form	M18×1.5 (customizable)
Installation direction	Any direction
Cable outlet mode	Cable outlet cable or connector

A a Installation and Use Instructions

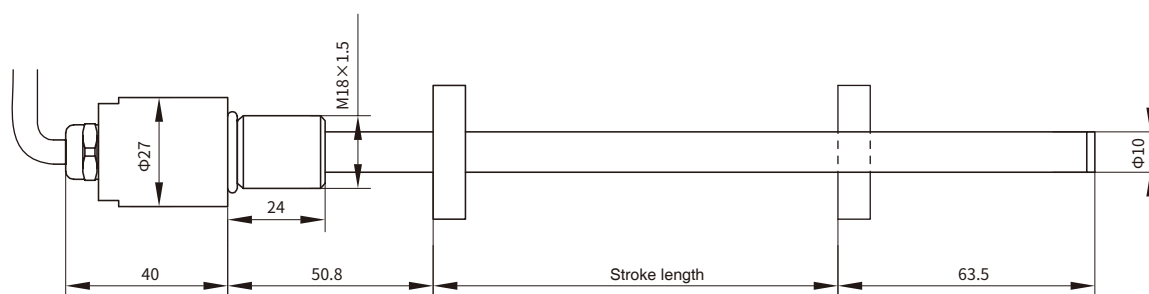
• Output characteristic

RD Series sensors are designed in a split form and are suitable for installation in cylinder, especially for cylinder applications in confined spaces. The sensor consists of two parts: a sensing rod and an electronic bin. The sensor rod is a pressure-resistant stainless round pipe with threads or flanges to provide protection for the sensing elements, and the whole sensor rod is installed in the cylinder through pistons. The temperature resistance of the sensing rod up to + 125 °C, and the protection level reaches IP68, which is very suitable for harsh occasions such as high temperature, high humidity and water vapor; The electronic bin encapsulates the sensor signal processing part and the external interface together, reaching IP67 protection level, and can be connected with the sensor rod through the side or bottom of the connector plate.

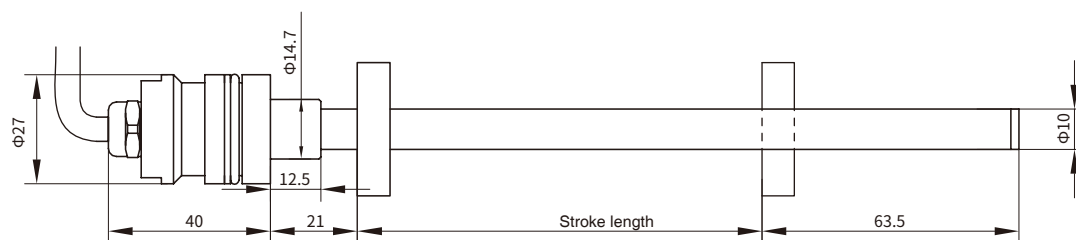
• RD Split Sensor Installing Dimensions



• Flange A metric thread M18×1.5 hexagon flange 46



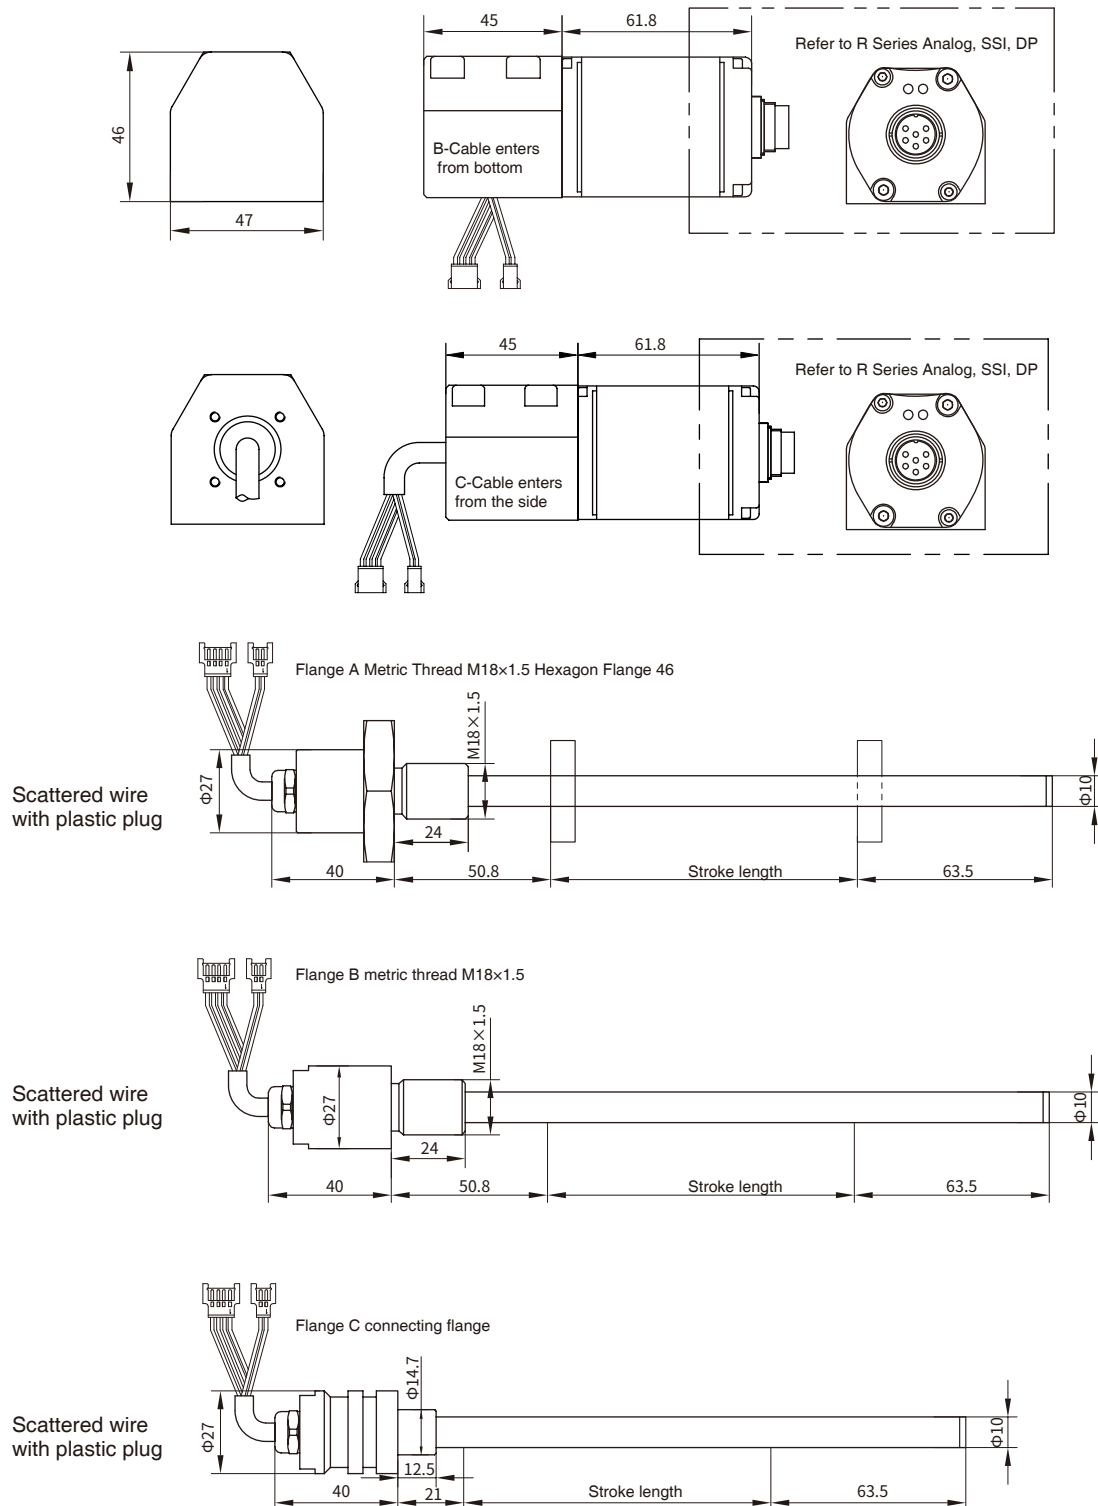
• Flange B metric thread M18×1.5




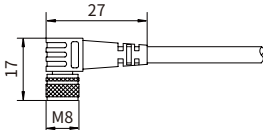
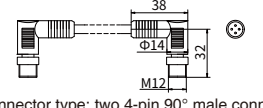
• Flange C connecting flange




A a Installation and Use Instructions





• RDSplit Sensor Installing Dimensions






C Common Accessories-Profinet Output

Accessory name/ model		Dimensions	
4-pin female connector (For power supply) Order No.: 522000-xx (xx- cable length, unit m)			
4-pin90° female connector (For power supply) Order No.: 522001-xx (xx- cable length, unit m)			
For power supply (Cat 5e) d-coded Order No.: 522004-xx (xx- cable length, unit m)		 Connector type: two 4-pin 90° male connectors (M12) Cable sheath: PVC, light blue operating temperature:-40 C ~80 C	

Accessory name/ model		Dimensions	
For power supply (Cat 5e) d-coded Order No.: 522005-xx (xx- cable length, unit m)		 Connector type: RJ45, 4-pin 90° male connector (M12) Cable sheath: PVC, light blue working temperature:-40 C ~80 C	
For power supply (Cat 5e) d-coded Order No.: 522006-xx (xx- cable length, unit m)		 Connector Type: RJ45, 4-pin straight male connector(M12) Cable sheath: PVC, light blue Working temperature:-40 C ~80 C	
For power supply (Cat 5e) d-coded Order No.: 522008-xx (xx-cable length, unit m)		 Connector type: Two straight male connectors (M12) Cable sheath: PVC, light blue Working temperature:-40 C ~80 C	

Accessory name/ model		Dimensions	
Standard magnet ring Order No.: 211501			
Sector magnet Order No.: 211502			
Slider magnet Order No.: 211503			
Square magnet Order No.: 211508			

Accessory name/ model		Dimensions	
Magnetic isolation gasket			
Sector magnetic isolation gasket			
4-pin male connector Order No.: 312723			

Note: Please refer to "Magnet Selection" and "Cable Selection" for details of cables, magnet rings and other models.

• Wiring mode



• Connector Connection Mode (Interface 1, 2)

Pin	Wire color	Pin/wire function definition
1	Yellow	Tx +
2	White	Rx +
3	Orange	Tx -
4	Blue	Rx -

• Single cable outlet connection mode

Pin	Wire color 1*	Pin/wire function definition
1	Yellow	Tx +
2	White	Rx +
3	Orange	Tx -
4	Blue	Rx -
5	Red	24Vdc
6	Black	COM

Note: * Wire color 1: light green, PUR sheath, 6 cores,-40C~85 C



4-pin connector socket
(for power supply)

• Connector Connection Mode (Interface 3)

Pin	Wire color	Pin/wire function definition
1	Brown	+24Vdc (-20%~+20%)
2	White	Do not connect
3	Blue	COM
4	Black	Do not connect

• Double cable outlet connection mode

Pin	Wire color1*	Wire color2*	Pin/wire function definition
1	Yellow	Yellow	Tx +
2	White	White	Rx +
3	Orange	Orange	Tx -
4	Blue	Blue	Rx -
5	Red	-	24Vdc
6	Black	-	COM

Note: * Wire color 2: light green, PUR sheath, 4 cores,-40C~70 C

G Selection of Cable Accessories for Industrial Ethernet

NET - M - - - - -

01 02 03 04 05 06 07 08 09 10

01 - 03	Type
N E T	Industrial Ethernet
04 - 07	Cable length
M * * *	Less than 3 digits are preceded by zeros, and M means metric system, unit m
08 - 10	Cable type, outlet mode
08	Cable type
D	PVC sheath, blue, 8-pin, shielded, CAT-5e,-40~85°C
A	PUR sheath, green, 4-pin, shielded, CAT-5eES,-40~70C
09 10	Connection
1 1	Two 4-pin connector, M12, d-code
2 2	Two 4-pin right angle male connectors, M12, d-code
1 3	One end 4-pin connector, M12, d-code, one end shielded RJ45 connector
2 3	One end 4-pin right angle male connector, M12, d-code, one end shielded RJ45 connector

- Selection example: NET-M010-D11
Indicates: Ethernet cable, 10m long, PVC sheath, blue, 8-pin, CAT-5e standard, shielded,-40~85C, 4-pin connector at both ends, M12, d-code.
- Selection example: NET-M020-A23
Indicates: Ethernet cable, 20 meters long, PUR sheath, green, 4-pin, shielded, CAT-5eES,-40~70°C, 4-pin right angle male connector at one end of the cable, M12, d-code, and shielded RJ45 connector at one end.

L LED real-time state monitoring and diagnosis

Green light	ON	ON	ON	Flash
Red light	OFF	ON	Flash	×
Function	Normal work	The network cable is not connected	Configuring	Fault

