


RS Waterproof Displacement Sensor



Technical Characteristics

- Non-wear, non-contact measurement method Rugged and
- fully enclosed design
- Linear measurement, absolute position output Low power
- consumption design effectively reduces system heating
- Sealing grade up to IP67
- Multiple signal type optional: Analog, SSI, CANopen, Start/Stop

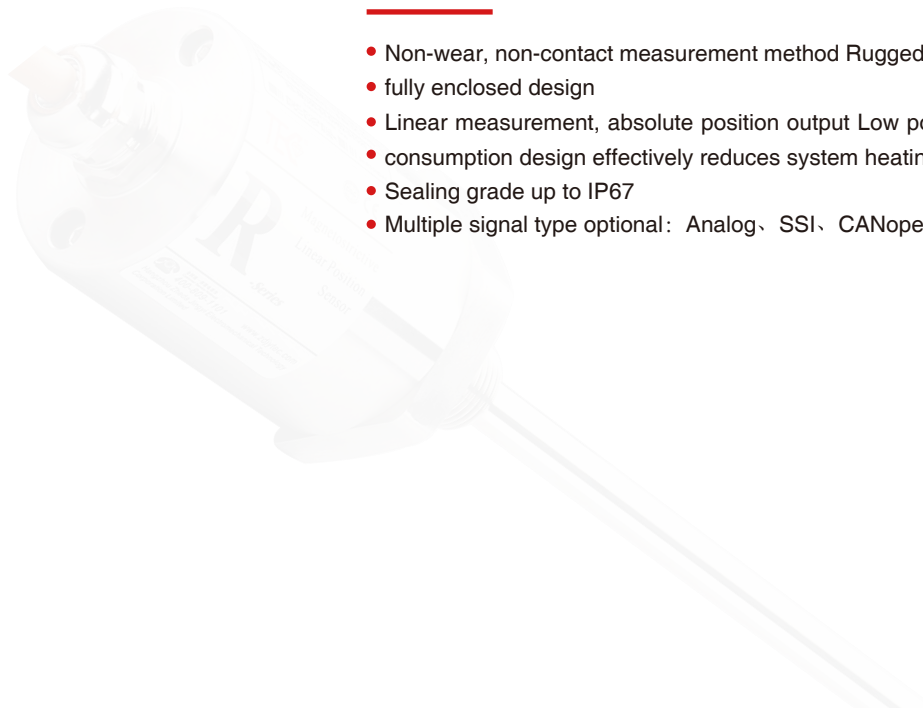

Product Parameters

• Input

Measurement data	Position Magnet ring
Stroke length	50mm~5500mm, customized according to customer's needs
Number of measurements	1

• Output

Interface	Start/Stop
Resolution	Controller dependent (minimum accuracy 5μm)
Nonlinearity	< ± 0.01% of full scale, Min. ±50μm
Repetition accuracy	< ± 0.001% of full scale, Min. ± 1μm
Hysteresis	< 10μm
Update time	1KHz (range ≤ 1m) 500Hz (1m < range ≤ 2m) 250Hz (2m < range ≤ 3m), customizable
Temperature coefficient	< 30ppm/°C

• Working conditions

Magnet ring velocity	Arbitrary
Protection level	IP68
Operating temperature	-40 °C ~ +105 °C
Humidity/dew point	Humidity 100%, relative humidity
Shock index	GB/T2423.5 100g(6ms)
Vibration index	GB/T2423.10 20g/10~2000Hz
EMC test	GB/T17626.2/3/4/6/8, Grade 4/3/4/3/3, Class A, CE Certification

• Electrical connection

Input voltage	Normal: +24Vdc ± 20% Wide voltage: 9Vdc~28.8Vdc
operating current	< 90mA (varying with range)
Polarity protection	Max. -30Vdc
Overpressure protection	Max. 36Vdc
Insulation resistance	> 10MΩ
Insulation strength	500V

• Structure and materials


Electronic bin	304 stainless steel, or 316L according to customer requirements
Measuring rod	304 stainless steel, or 316L according to customer requirements
Outer tube pressure	35MPa (continuous)/70MPa (peak) or 350bar (continuous)/700bar (peak)
Position magnet	Standard Magnet ring and various magnet rings
Mounting thread form	M18×1.5、M20×1.5、3/4"-16UNF-3A (customizable)
Installation direction	Any direction
Cable outlet mode	Cable outlet

A a Installation and Use Instructions

• Output characteristic


RS series sensors have strong protective shell, which is durable and can provide users with continuous, reliable and real-time displacement signals in harsh environment. The sensor is completely sealed with stainless steel shell, which fully meets the protection level IP68. Note: The electronic compartment is not detachable.

Because of the non-contact measurement technology, the sensor can be integrated in an isolated and sealed shell. The position magnet moves along the measuring rod, and the position can be measured without mechanical contact. For liquid level measurement, an alternative float can be used. The sensor with high protection level shell is easy to install and use, so as to better meet the application requirements. The measurement accuracy and all technical parameters depend on the output characteristics of the selected sensor, and the interface form can be selected: analog or SSI.

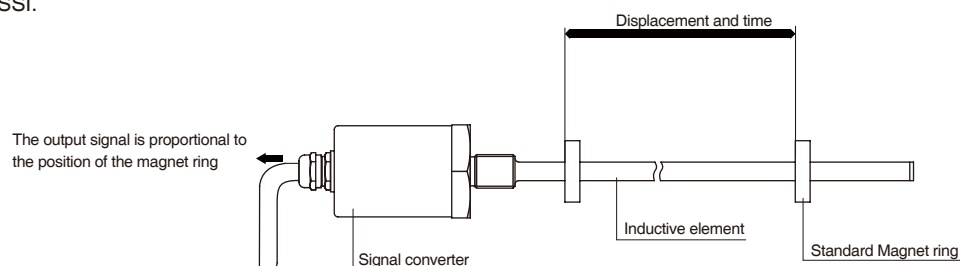

• Installation dimensions of RS waterproof sensor

RS Series super protective Sensor, designed for cylinder built-in installation in harsh environment, withstands pressure of 35MPa for continuous, flexible and simple installation mode, and mounting thread form M18×1.5 or M20×1.5 or 3/4"-16UNF-3A.

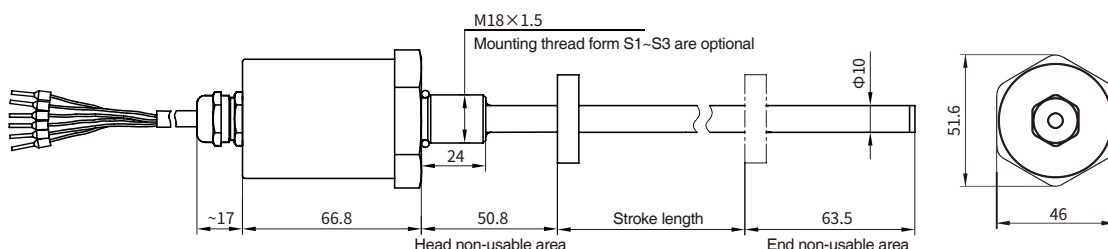

Note: It is equipped with standard Magnet ring kit 288501, with magnetic isolation gasket and fixing screw.

C c Commonly Used Accessories

Accessory name/ model	Dimensions	Accessory name/ model	Dimensions	Accessory name/ model	Dimensions
Standard Magnet ring Order No.: 211501		Magnet ring Order No.: 211506		Enlarge magnet ring Order No.: 211504	
Magnet ring Order No.: 211507					

• **Note:** Please refer to "Magnet ring Selection" for details of Magnet ring kit and other models

J J Wiring Mode

When the sensor is a connector output, refer to the pin definition in the following table for wiring mode; when the sensor is cable outlet cable output, refer to the cable color definition in the following table for connection mode




Start/Stop Output

- 6-pin male connector arrangement (facing the sensor head)

Pin	Line color 1*	Line color 2*	Pin/wire function definition
1	Blue	Grey	Stop (-)
2	Green	Pink	Stop (+)
3	Yellow	Yellow	Start (+)
4	White	Green	Start (-)
5	Red	Brown	+24Vdc power supply (-20%~+20%)
6	Black	White	0 Vdc(power supply circuit)

Note: * Line color 1: Cable PUR sheath, orange,-20~90 ℃
 * Line color 2/3: Cable PVC sheath, orange,-20~105 ℃



Start/Stop Output

- Pin arrangement of eight-pin male connector (facing the sensor head direction)

Pin	Line color 1*	Pin/wire function definition
1	Yellow	Start (+)
2	Grey	Stop (+)
3	Pink	Start (-)
4	-	Reservation
5	Green	Stop (-)
6	Blue	0 Vdc(power supply circuit)
7	Brown	+24Vdc power supply (-20%~+20%)
8	White	Reservation

X Selection Guide-Start/Stop Output

RS - M - - - R - -

01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21

01 - 02	Sensor shell form
R S	Pressure-resistant pipe

03 - 07	Measuring range
	Four digits, less than four digits are preceded by zero, M means metric system, unit mm

08 - 09	Magnet ring type/mounting thread form
S 1	M18×1.5, measuring rod diameter 10mm, 304 material
S 2	M20×1.5, measuring rod diameter 10mm, 304 material
S 3	3/4"-16UNF-3A, measuring rod diameter 10mm, 304 material

10 - 13	Connection form
10 - 11	Cable outlet mode
D H	PUR sheath, orange,-20~90℃, end scattered, cable color 1
D U	PVC sheath, orange,-20~105℃, end scattered, cable color 2
D B	PVC sheath, orange,-20~105℃, end scattered, cable color 3
D I	PUR sheath, orange,-20~90℃, end 6-pin connector
D V	PVC sheath, orange,-20~105℃, end 6-pin connector
D C	PVC sheath, orange,-20~105℃, end 8-pin connector
12 - 13	Cable length, 01~99 units: m, (Cable outlet mode)

10 - 13	Cable outlet mode
10 - 13 0 D R	cable outlet first and end with plastic connector

0 D R 2	Scattered wire with plastic connector 65 mm
0 D R 3	Scattered wire with plastic connector 170 mm
0 D R 4	Scattered wire with plastic connector 230 mm
0 D R 5	Scattered wire with plastic connector 350 mm

10 - 13	Connector mode
P H 6 0	M16 male connector (6 pins)

Note: For supporting cables, please refer to Analog/Start-stop Cable Accessories Selection

14 - 17	Signal output mode
15	Input voltage
1	+ 24Vdc (- 20% ~ + 20%)
2	+ 9 ~ 28.8Vdc
16 - 17	Output signal
0 1	Start/Stop, multi-Magnet

18 - 19	Non-usable area at head and end, customizable
S 0	50.8mm+63.5mm
B 0	30mm+60mm

20-21	Country
 	Refer to the country list

Mm Selection Guide of Analog/Start-Stop Cable Fittings

A	S	T	-	M				-			
01	02	03		04	05	06	07		08	09	10

01 - 03	Type
A S T	Analog/Start-Stop interface
04 - 07	Cable length
M * * *	Less than 3 digits are preceded by zeros, and M means metric system, unit m
08 - 10	Cable type, outlet mode
H 0 1	One 6-pin (M16) female connector, and one end scattered
H 0 3	One 6-pin (M16) right angle female connector, and one end scattered
U 0 1	One end 6-pin (M16) female connector, and one end scattered
U 0 2	One end 8-pin (M16) inserted into female connector, and one end scattered
U 0 3	One end 6-pin (M16) right angle female connector, and one end scattered
U 0 4	One end 8-pin (M16) right angle female connector, and one end scattered
Note	H: Cable type, PUR sheath, orange, -20~90 °C U: Cable type, PVC sheath, orange, -20~105 °C

- Selection example: AST-M005-H01
Indicates: analog or start-stop interface cable, 5 meters long, PUR sheath, orange, -20~90 °C, with 6-pin (M16) at one end female connector and scattered at one end.
- Selection example: AST-M010-U04
Indicates: Analog or Start-Stop interface cable, 10 meters long, PVC sheath, orange, -20~105 °C; One end 8-pin (M16) right angle female connector, and one end scattered.